

# VB Technical Data Sheet


Key Interlocking a Division of Performance Innovations Ltd.



Phone: 604-940-0068

Fax: 604-940-1047

Email: sales@keyinterlocking.com

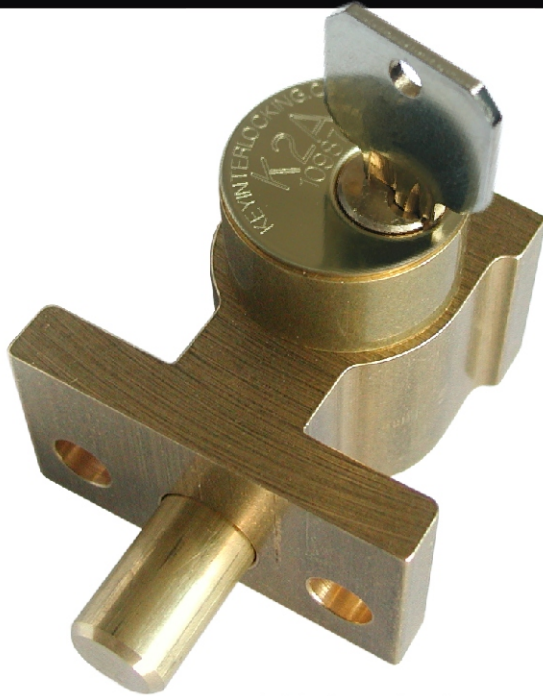

VB Interlock  
(bolt left)

## Type VB Interlocks (Base Mount)

- Solid brass construction
- 5/8" diameter locking bolt
- 3/4" bolt travel
- 2 mounting holes for 3/8" bolts @ 1 3/4" spacing thru base of lock

## Options

- Available bolt left (pictured above) or bolt right (bolt on right side of housing)
- Bolt lengths from 0"- 7" available  
Bolt length measured in withdrawn (W) position..  
Example 0" bolt length will be 0" when bolt retracted 3/4" when bolt extended
- Key removable position (E) extended, or (W) withdrawn  
Example a 0" (E) extended lock  
Key will be removable when the bolt is extended 3/4" and be trapped when bolt is retracted to 0"
- VB locks available with up to 5 cylinders
- Specify Key Interchange. (A1,A2,B1 etc.)
- Available with auxiliary switch's
- Available with dust covers

# VB Technical Data Sheet


Key Interlocking a Division of Performance Innovations Ltd.



Phone: 604-940-0068

Fax: 604-940-1047

Email: sales@keyinterlocking.com

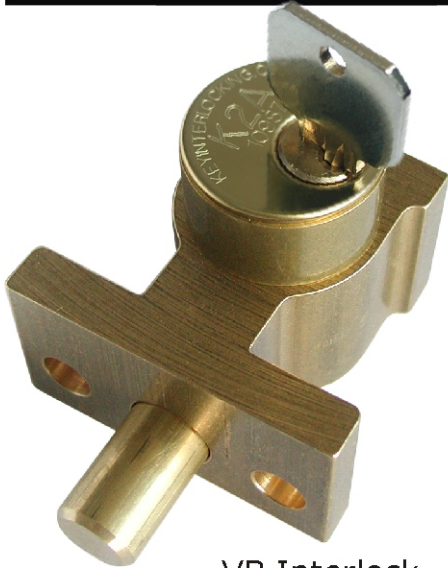

VB Interlock  
(bolt left)

